


SOL-12-200-MC4 (PN-021814)



FEATURES

- M10 monocrystalline cell type
- Up to 2 bypass diodes protect against hot-spot damage during partial shading
- Anodized aluminum frame for increased durability
- Anti-reflective glass coating
- MC4 compatible connectors

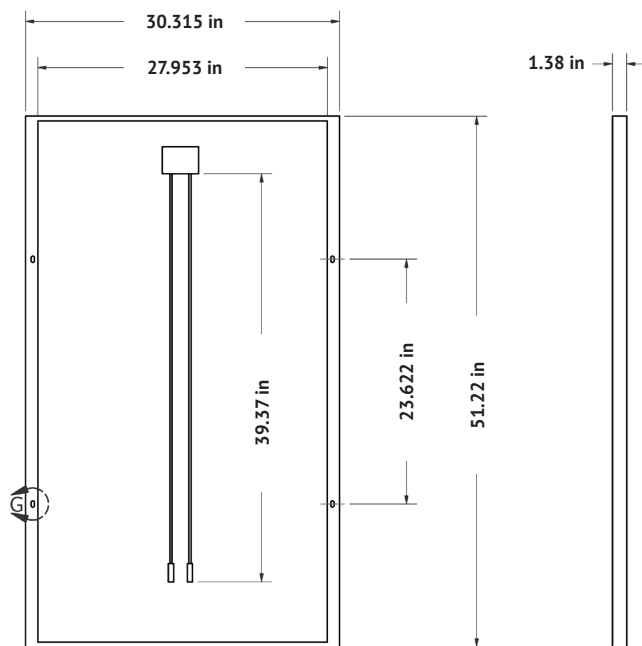

SOL-24-200-MC4 (PN-021915)

SOLAR MODULE 200W / 12V & 24V

High-quality module provides reliable solar electric power for industrial applications including monitoring and control, security, telecom, instrumentation, communications, and general battery charging.

ELECTRICAL SPECIFICATIONS	12V	24V
Rated Power (Watts)	200W	200W
Voc Open Circuit Voltage (Volts)	24.9V	44.8V
Isc Short Circuit Current (Amps)	10.28A	5.10A
Vmp Rated Voltage (Volts)	21.20V	42.10V
Imp Rated Current (Amps)	9.54A	4.75A
Max System Voltage (VDC)	600VDC	600VDC
Series Fuse Rating (Amps)	15A	15A

ELECTRICAL / THERMAL PARAMETERS	
Voltage Temperature coefficient (Voc)	-0.28 % / °C
Current Temperature coefficient (Isc)	-0.05 % / °C
Power Temperature coefficient (Pmax)	-0.37 % / °C
Peak Power Tolerance	+/- 3%

DIMENSION AND WEIGHT

Module Size (LxWxD) inches	50.8 x 30.3 x 1.38
Module Size (LxWxD) mm	1290 x 770 x 35.05
Weight in lbs	28

WARRANTY

Five years on material, ten years on performance, 20 years on performance (pro-rated based on performance degradation)



SHOP NOW

